



Model: AC101 / AC102 / AC103

Fingerprint Time Clocking System

Introducing time clocking system of the future, **FINGERTEC®** AC100 series; the system that incorporates fingerprint verification technology to produce precise clocking time of each employee.


The **FINGERTEC®** AC100 series system's terminal is built with user-friendly features; guarantees user a hassle-free and fast process in every use. The **FINGERTEC®** AC100 series system allows storage of up to 120,000 transactions at a time and capable of storing a maximum of 2,800 templates; suitable for offices, retail outlets and factories use.

The **FINGERTEC®** AC100 series system is bundled with time and attendance management software for easy administration of human resources.

With the functions and capabilities it offers, the **FINGERTEC®** AC100 series system is an excellent tool for better human resource management. The **FINGERTEC®** AC100 series puts a stop to 'buddy punching' and gives you real value for your money.

[FEATURES & BENEFITS]

- ▶ Manage one-to-many (1:N) verifications of 1,000 templates (AC101), 1,500 templates (AC102) and 2,800 templates (AC103)
- ▶ Allow a maximum of 10 fingerprints enrollment per user
- ▶ Allow 360° fingerprint placement
- ▶ Possess storage capacity of 30,000 (AC101), 100,000 (AC102), 120,000 (AC103) transactions
- ▶ Offer easy enrollment and fast clocking system
- ▶ Equipped with voice greeting to ease operation
- ▶ Enable transactions download with RS232, RS485 and TCP/IP
- ▶ Complete with easy-to-use Windows based time and attendance management software
- ▶ Improved management of human resource



Fingerprint Time Clocking System

One finger solves it all



Model: AC101 / AC102 / AC103




[LAYOUT PLAN]

Layout Plan (Standalone)



TCP / IP or RS485 Environment

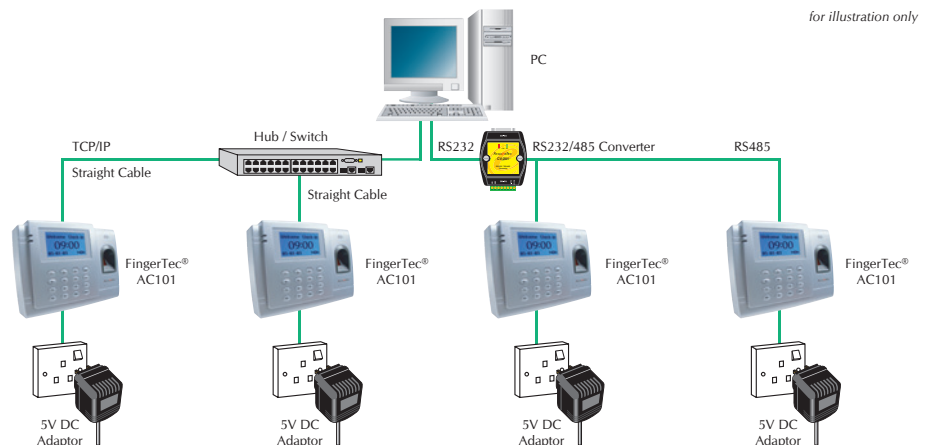

[SPECIFICATIONS]

Size (mm)	192 (L) x 141 (H) x 47 (W)
Identification Time (s)	≤ 2
Enrollment	Up to 10 fingerprints per user
Fingerprint Placement	Any angle (360°)
FAR	< 0.0001%
FRR	< 1%
Transaction Storage	30,000 (AC101), 100,000 (AC102), 120,000 (AC103) buffered transactions
User Capacity	1,000 templates (AC101) / 1,500 templates (AC102) / 2,800 templates (AC103)
Communications	RS232, RS485, TCP/IP
Baud Rate (bps)	9600, 19200, 38400, 57600, 115200
Operating Temperature (°C)	0 - 45
Operating Humidity (%)	20 - 80
Power	5V DC Power Adaptor
**Optional Power	5V3A Power Supply with backup battery / Uninterrupted Power Supply (UPS) 700VA, 420 watt
Language	English, Chinese Simplified, Chinese Traditional, Indonesian and Thai

Authorized Reseller:

BioAccSys

BIOMETRIC ACCESS SYSTEMS PTY LTD
Tel: 61-7-55286222 Email: info@bioaccsys.net
www.bioaccsys.net

© 2006 FingerTec Worldwide Ltd. All rights reserved.